




## How to Order

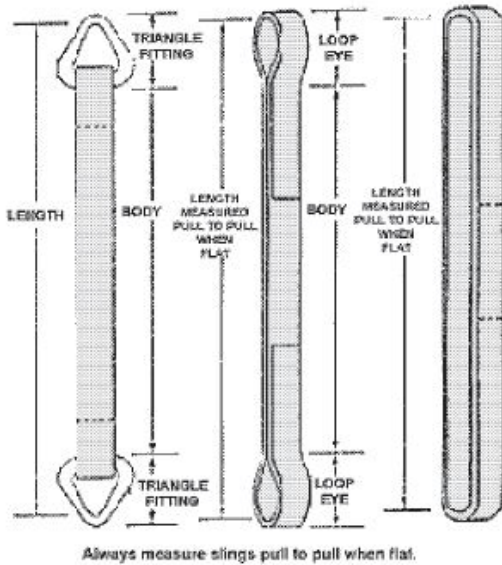


### When ordering slings consider the following:

- Type of Hitch
- Capacity tables
- Sling to Load Angles.

### Available Web Sling Codes

- TC- Triangle & Choker End Fitting
- TT- Triangle & Triangle End Fittings
- EE- Eye & Eye – Flat Eyes, standard – Eye & Eye – Twisted Eye
- EN – Endless
- RE – Reversed Eye
- SH – Stone Handling
- WL- Wide Lift
- WLA – Wide Lift Attached Eye

### Web Sling Order Code

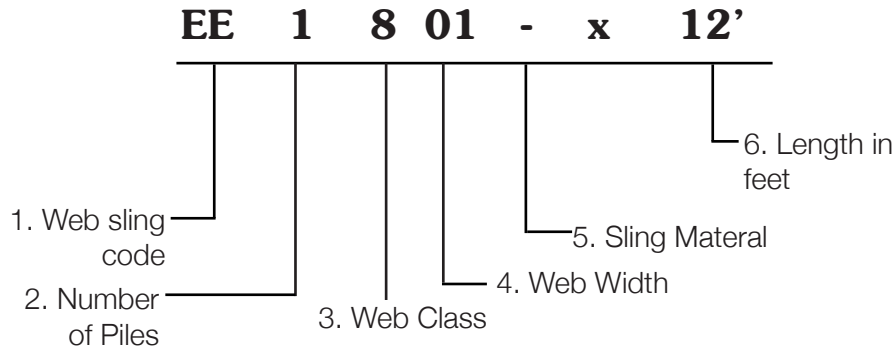

### Eye Length Chart

Eye lengths of types 3&4 varieties with sling width and number of webbingsplies.

Sling Width	Plies of Webbing			
	1	2	3	4
1"	10"	12"	14"	14"
2"	10"	12"	14"	14"
3"	14"	14"	16"	16"
4"	14"	14"	16"	16"
5"	14"	14"	16"	16"
6"	16"	16"	18"	18"
8"	18"	18"	20"	20"
10"	24"	24"	26"	26"
12"	24"	24"	26"	26"

### Number of plies

This refers to the number of thickness of webbing in the body of the slings. Generally available in 1,2,3 and 4 plies.

### Width

Standard web widths range from 1" through 12". Standard sling widths up to 24".

### Sling Material

Unless specified, nylon webbing will be standard. Polyester webbing is also available.

### Treatment for abrasion

Unless specifically requested, all nylon & polyester web slings will have an abrasion-resistant treatment applied.